

# RefrigerationX

2305 W. 190th St., Torrance, CA 90504  
www.RefrigerationX.com

|                   |        |
|-------------------|--------|
| Project:          |        |
| Model #:          |        |
| Item #:           |        |
| Available W/H:    | Qty:   |
| Approval:         |        |
| AIA #:            | SIS #: |
| CSI Section 11400 |        |

## Undercounter Refrigerator

Undercounters  
X-line

**Model : XUR-48-N6**



### FEATURES & BENEFITS

#### ■ Hydrocarbon refrigerants (R-600a)

With innovative and eco-friendly technology, RefrigerationX brings you hydrocarbon refrigerators designed to meet DOE's Energy Conservation Standards in 2017 and to use EPA's SNAP Program approved HC refrigerants. Hydrocarbon refrigerants do not deplete the ozone layer and have very low contribution to global warming (ODP-0, GWP-3).

#### ■ Ergonomically designed doors

Customers' fatigue fades away with easy grip handles and doors that open effortlessly. These features along with self-closing doors make this the ultimate choice in customer convenience. ABS sheet door liners resist water condensation with thermal efficiency.

#### ■ Cabinet construction

X-line model boasts a stainless steel exterior (door) with AL exterior sides (galvanized steel back and bottom). Interior is stainless steel floor and back with AL sides. It guarantees the utmost in cleanliness and long product life.

#### ■ High-density polyurethane insulation

The entire cabinet structure and solid doors are foamed-in-place using high density, CFC free polyurethane insulation.

#### ■ Self-contained system

#### ■ Adjustable, heavy duty, PE (polyethylene) coated wire shelves

#### ■ 4" dia. swivel casters with locks on the front set

#### ■ Refrigerator holds 33°F ~ 38°F for the best in food preservation

NATURAL  
Refrigerant

ETL  
Intertek

ETL  
Intertek

2 YEAR  
WARRANTY

5 YEAR  
WARRANTY


ENERGY STAR®  
Qualified

| Model     | Swing Doors | CU./FT. | #of Shelves | HP  | AMPS | Crated Weight (lbs.) | L x D* x H† (inches) |
|-----------|-------------|---------|-------------|-----|------|----------------------|----------------------|
| XUR-48-N6 | 2           | 13.24   | 2           | 1/5 | 1.5  | 265                  | 48 1/4 x 30 x 30     |

# Undercounter Refrigerator

Undercounters  
X-line

## Model : XUR-48-N6

| ELECTRICAL DATA            |  |
|----------------------------|--|
| Voltage                    | 115/60/1   |
| Plug Type                  |  NEMA 5-15P |
| Full Load Amperes          | 1.5  |
| Compressor HP              | 1/5  |
| Cord Length (ft.)          | 9  |
| Refrigerant                | R-600a   |
| DIMENSIONAL DATA           |  |
| Net Capacity (cu. ft.)     | 13.24  |
| Ext. Length Overall (in.)  | 48 1/4 (1225mm)  |
| Ext. Depth Overall (in.)*  | 30 (762mm)   |
| Ext. Height Overall (in.)† | 30 (762mm)   |
| # of Doors                 | 2  |
| # of Shelves               | 2  |
| Shelf Size (L x D) (in.)   | 21 x 17  |
| Net Weight (lbs.)          | 245  |
| Gross Weight (lbs.)        | 265  |

Design and specifications subject to change without notice.

Actual shipping weight may differ due to extra packing materials for product protection.

\* Depth does not include 1" for rear spacers.

† Height does not include 5-5/8" for caster height.


### ■ WARRANTY : 2 Year Parts and Labor Warranty Additional 3 Year Warranty on Compressor

### ■ OPTIONAL ACCESSORIES


- 1" caster, 1/2" diameter & 13 TPI: S28R813660 (non-brake)
- 2.5" caster, 1/2" diameter & 13 TPI: 30265H0100 (non-brake), 30265H0200 (w/ brake)
- 5" caster, 1/2" diameter & 13 TPI: M726500100 (non-brake), M726500200 (w/ brake)
- Leveling leg, 1/2" - 13 TPI x 1.54": LFM1213566
- 6" ABS plastic leg: 30221M0200
- 6" stainless steel leg: 30221M0600
- Single overshef, stainless steel, 48-3/8" W: TSOS-4S
- Additional PE coated wire shelf: WM77800101

## PLAN VIEW

(unit : inch)

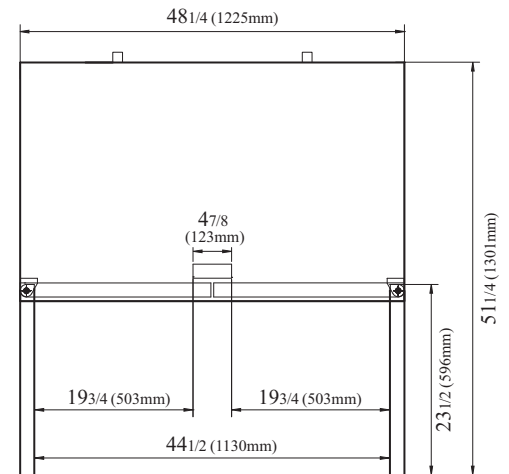

TOP VIEW

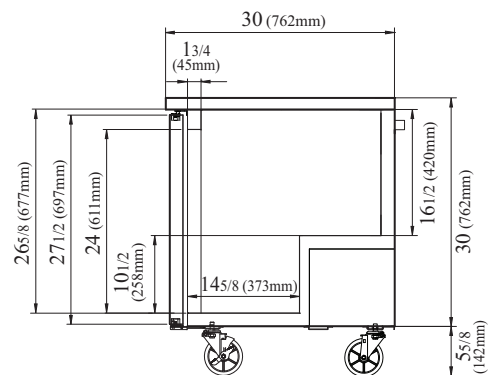

SIDE VIEW

Ver.20230309

NATURAL  
Refrigerant



ENERGY STAR®  
Qualified