

GLASS DOOR MERCHANDISER REFRIGERATORS

Multiple Swing Doors

EM – Series • EMSGR33 • EMSGR48 • EMSGR69



▲ EMSGR33



▲ EMSGR48



▲ EMSGR69

Cabinet Construction

Heavy duty white coated steel for cabinet interior and exterior. High quality stainless steel interior floor with round edges for convenient cleaning. ABS evaporator drain covers. 2.5" thick high density foamed-in-place polyurethane insulation. Adjustable screw legs for leveling. One additional heavy duty adjustable screw leg located at bottom of front cabinet for weight support for model EMSGR69.

Refrigeration System

- Bottom mounted condensing unit
- Removable bottom grill and slide-out condensing unit for easy repair and maintenance
- Oversized condenser and evaporator coils quickly achieve and maintain desired temperature
- Forced-air cooling with oversized evaporator fan motors provide balanced airflow throughout cabinet to ensure faster temperature drop
- Environmentally friendly CFC free R-134A refrigerant
- Air defrost controlled by thermostat
- Copper tube and aluminum fin evaporator with anti-corrosive coating
- Energy efficient condensate drain pan with wicking pads for self sufficient condensation removal
- Pre-wired and ready to plug, 115V/60Hz/1Ph, NEMA 5-15P

Lighting

- Shielded vertical LED interior lighting with on/off switch for energy efficiency, minimal heat generation and enhanced illumination

Doors

- Black PVC door frames
- Low emissivity double pane glass system reflects UV rays and improves insulation for maximized energy efficiency
- Heavy duty adjustable torsion spring self-closing door system
- One piece snap-in magnetic door gaskets for easy replacement
- Heavy duty die-cast door handles

Shelving

- Four epoxy coated wire shelves per section
- Stainless steel pilasters and shelf clips

Temperature Control

- Factory preset temperature, 35°F
- Temperature setting range from 32°F to 42°F
- Easy to set thermostat dial




Option

- 2 1/2" and 4" diameter casters (3 1/2" and 5" overall height)





5 YEAR Compressor
3 YEAR Parts & Labor


Dimensions

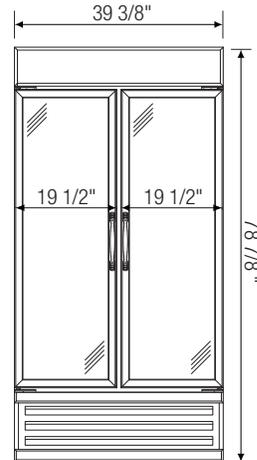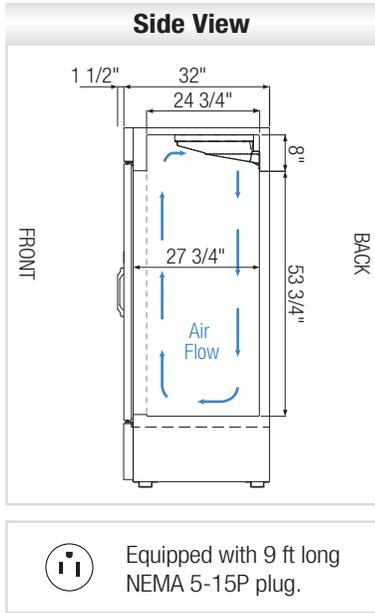


▲ EMSGR33

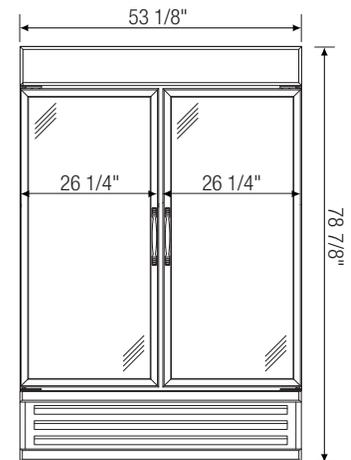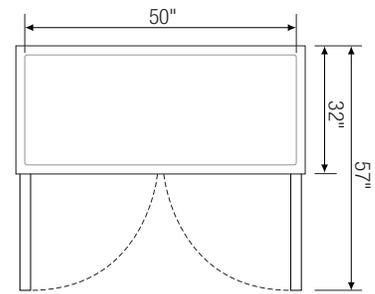

▲ EMSGR48

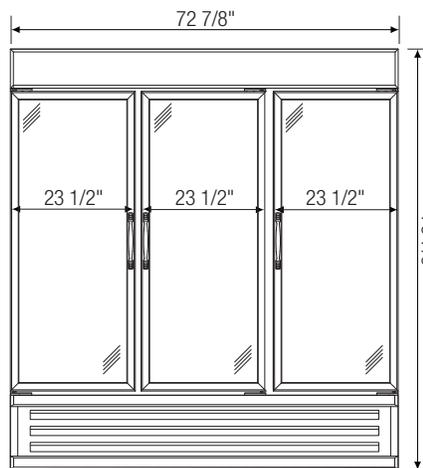

▲ EMSGR69

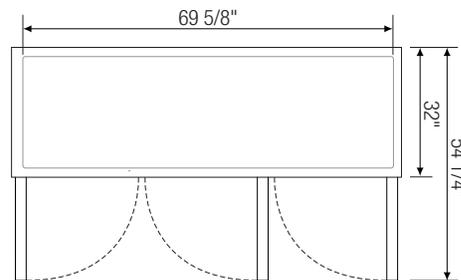

Model	Ref/ Frz/ Dual	# of Doors	Capacity (Cu.Ft.)	HP	Capacity 20 oz. Bottles	Refrigerant	# of Shelves	Power (V-Hz-Ph)	Amps	Crated Weight (LBS)	Exterior Dimensions (Inches)			Interior Dimensions (Inches)		
											L	D*	H	L	D	H
EMSGR33	Ref	2 (swing)	33	1/3	336	R-134A	8	115-60-1	10.40	414	39 3/8	32	78 7/8	36 1/4	27 3/4	61 3/4
EMSGR48	Ref	2 (swing)	48	1/2+	448	R-134A	8	115-60-1	10.40	533	53 1/8	32	78 7/8	50	27 3/4	61 3/4
EMSGR69	Ref	3 (swing)	69	3/4+	672	R-134A	12	115-60-1	11.00	698	72 7/8	32	78 7/8	69 5/8	27 3/4	61 3/4

* : Exterior depth dimension does not include 1-1/2" for door handles.

Ref = Refrigerator

Specifications subject to change without notice.

Product dimensions are for general purposes and not absolute value. Product capacity(▶) is calculated based on standard industry figures. Slight variations may exist. If dimensions and capacity are critical, please contact Everest Refrigeration.



Please visit our website for updated Energy Efficiency information.