

NOR-LAKE, INCORPORATED
727 Second Street
Hudson, Wisconsin 54016

800-955-5253
715-386-2323
866-961-5253 Parts
800-388-5253 Service
715-386-4291 FAX
www.norlake.com



FLAT LID DISPLAY FREEZER



FTB52-12

PROJECT:

ITEM NUMBER:

MODEL NUMBER:

FLAT LID DISPLAY FREEZER

SPECIFICATIONS FOR: FTB31-6, FTB43-9, FTB52-12, FTB71-17

- **Finish:** Painted white powder coated steel interior and exterior
- **Doors:** Sliding glass doors - flat glass with one piece frame, lid locks with keys
- **Hardware:** (4) four casters, baskets and dividers, rubber bumper guards on grill side
- **Electrical:** 115/60/1 with cord and plug
- **Refrigeration:** Self-contained refrigeration system. Operating temperature: -18°F to +10°F. All models except FTB71-17 are R-134a. FTB71-17 is R-404a
- **Approvals:** ETL Safety (US and Canada), ETL Sanitation


STANDARD FEATURES

- Baskets and dividers
- Bottom drain with plug
- External analog thermometer display
- Interior LED lighting with separate on/off switch
- Lid lock and keys
- Operating temperature: -18°F to +10°F
- Rubber bumper guards on grill side
- Sliding glass doors
- White interior and exterior
- Warranties: 1 year parts and labor
- Approvals: ETL Safety (US and Canada), ETL Sanitation

* Most options are available one week from receipt of order. Please contact us for specific questions.

** ETL is Intertek Labs Safety Certification Mark which indicates that Intertek has tested the equipment to applicable CSA Standards.

** ETL-Sanitation is Intertek Labs Sanitation Certification Mark which indicates that Intertek has tested the equipment to applicable NSF Standards.

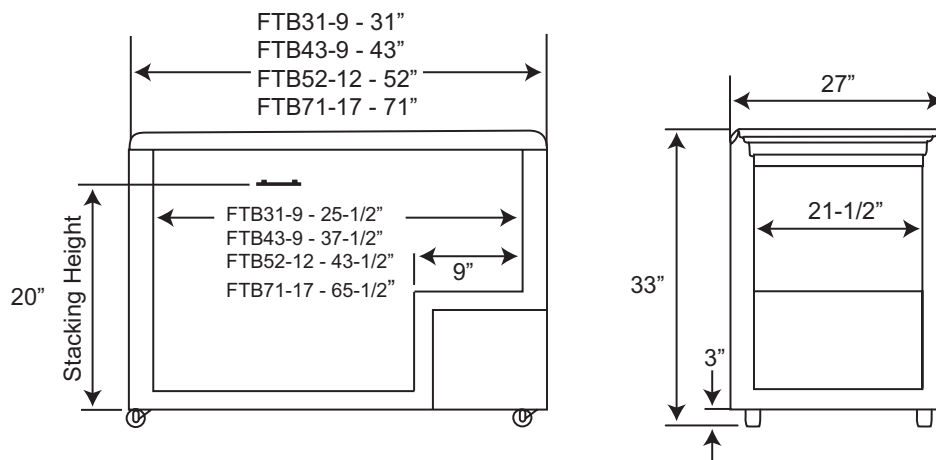

SPECIFICATIONS

Models	FTB31-6	FTB43-9	FTB52-12	FTB71-17
Crated Weight (lbs) (kg)	159 (72)	192 (86)	224 (101)	280 (126)
Crated Height (in) (cm)	39-1/2 (100)	39-1/2 (100)	39-1/2 (100)	39-1/2 (100)
Crated Width (in) (cm)	34 (86)	46 (117)	55 (140)	74 (188)
Crated Depth (in) (cm)	30 (76)	30 (76)	30 (76)	30 (76)
Interior Height (in) (cm)	25 (64)	25 (64)	25 (64)	25 (64)
Interior Width (in) (cm)	25-1/2 (65)	37-1/2 (95)	43-1/2 (111)	65-1/2 (166)
Interior Depth (in) (cm)	21-1/2 (55)	21-1/2 (55)	21-1/2 (55)	21-1/2 (55)
Overall Height (in) (cm)	33 (84)	33 (84)	33 (84)	33 (84)
Overall Width (in) (cm)	31 (79)	43 (109)	52 (132)	71 (180)
Overall Depth (in) (cm)	27 (69)	27 (69)	27 (69)	27 (69)
Gross Cubage (CuFt) (L)	7.5 (212.3)	11.5 (325.5)	14.0 (396.2)	20.0 (566)
Number of Baskets*	2	3	4	5
Number of Casters	4	4	4	4
Condensing Unit Size	1/3 HP	1/3 HP	1/3 HP	2/3 HP
Refrigerant	R-134a	R-134a	R-134a	R-404a
Electrical Characteristics	115/60/1	115/60/1	115/60/1	115/60/1
Cord and Plug Furnished	Yes	Yes	Yes	Yes
NEMA Plug Configuration	5-15P	5-15P	5-15P	5-15P
Total Amp Draw	2.0	3.5	3.5	6.0

Specifications subject to change without notice.

* includes 1 divider per basket



NORLAKE®