The Vollrath Company, L.L.C



Project:

Item Number:

Quantity:

MIRAGE® CADET COUNTERTOP INDUCTION RANGE



DESCRIPTION

The portable countertop induction range is designed for light-duty front-of-the-house cooking such as omelette and pasta stations; and as a heat source for front-of-the-house serving applications. The ranges plug into standard, dedicated 15A outlets which are readily available in most restaurants and kitchens.

The induction ranges are equipped with a variety of safety features includina:

- Over-heat protection
- Small-article detection
- · Pan auto-detection function
- · Empty-pan shut-off
- · Safety auto-shut-off function

AGENCY LISTINGS

59300







This device complies with Part 18 FCC Rules.

59310









This device complies with Part 18 FCC Rules.

ITEMS

59300 Countertop Induction Range, 1800 Watt s (US only) Countertop Induction Range, 1400 Watt (US and Canada) 59310

FEATURES

- Power and temperature control
- 1-20 power levels
- °F/°C temperature from 100°-400° F (38°-204° C)
- Easy to read digital readout for power level
- 1-180 minute timer
- 75% efficiency rating
- Pushbutton controls
- 18-gauge stainless steel top case with a ceramic top.
- The bottom case assembly is durable molded plastic.
- Top displays HOT when unit is turned off, if the cooking surface is still hot
- 6-ft. (183 cm) cord with plug

WARRANTY

All models shown come with Vollrath's standard warranty against defects in materials and workmanship. For full warranty details, please refer to www.Vollrath.com.

CLEARANCE AND ENVIRONMENT REQUIREMENTS

- This appliance is intended for use with induction-ready cookware. It is not intended to be used with aluminum pans with a metal disk on the bottom.
- It is not recommended for use with cookware with less than a 4¾ inch (12 cm) bottom diameter, nor recommended for use with Vollrath pans: N3817, 3150, 47755 and 69607.
- All models require unrestricted intake and exhaust air ventilation for proper operation of the controls. The maximum intake temperature must not exceed 110°F (43°C). Temperatures are measured in ambient air while all appliances in the kitchen are in operation.
- Countertop models require a minimum clearance of 4 inches (10.2) cm) at the rear and 1 inch (2.5 cm) at the bottom.

| Approvals | Date |
|-----------|------|
| | |
| | |
| | |

Due to continued product improvement, please consult www.vollrath.com for current product specifications.




The Vollrath Company, L.L.C. 1236 North 18th Street Sheboygan, WI 53081-3201 U.S.A.


Technical Services techservicereps@vollrathco.com Induction Products: 800.825.6036 Countertop Warming Products: 800.354.1970 All Other Products: 800.628.0832

Main Tel: 800.624.2051 or 920.457.4851 Main Fax: 800.752.5620 or 920.459.6573 Customer Service: 800.628.0830 Canada Customer Service: 800.695.8560

MIRAGE® CADET COUNTERTOP INDUCTION RANGE

DIMENSIONS (Shown in inches (cm))

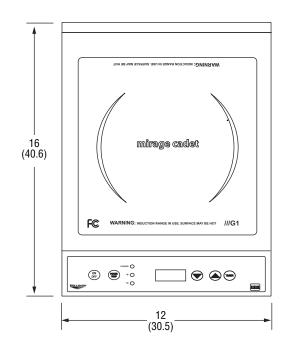

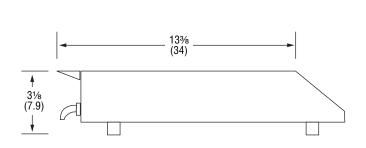

SPECIFICATIONS

| Item No. | Max Pan Diameter* In (cm) | Watts | Volts | Hz | Amps | Plug | Weight Lb (Kg) |
|----------|---------------------------------|-------|-------|----|------|-------|-------------------|
| 59300 | 14 | 1800 | 120 | 60 | 15 | NEMA | 10 |
| 59310 | (35.6) | 1400 | 120 | 00 | 12 | 5-15P | (4.5) |

Maximum pan diameter is provided as a guideline for achieving maximum performance. Other factors impact performance including pan construction material, the density and volume of the food in the pan, ambient temperature and food temperature.

Receptacle





The Vollrath Company, L.L.C. 1236 North 18th Street Sheboygan, WI 53081-3201 U.S.A. Main Tel: 800.624.2051 or 920.457.4851 Main Fax: 800.752.5620 or 920.459.6573

Customer Service: 800.628.0830 Canada Customer Service: 800.695.8560 Technical Services techservicereps@vollrathco.com Induction Products: 800.825.6036 Countertop Warming Products: 800.354.1970 All Other Products: 800.628.0832