

SAVE WATER. SERVE BETTER.

CONSERVEWELL™ UTENSIL HOLDER

Holds serving utensils above 140° F, keeping them safe against bacteria growth - environmentally smart and economically sound alternative to traditional dipper well perpetual-flow sinks

Available with or without timer, which helps ensure timely water changeouts

Drops into most existing counter cut-outs for perpetual flow dipper wells




9 foot 110V power cord allows for above or below counter plug-in

Cool touch thermal composite material safeguards servers

Includes (1) stainless steel inset; finger indents at sides make inset refills or cleaning quick and easy

GALLONS PER YEAR*

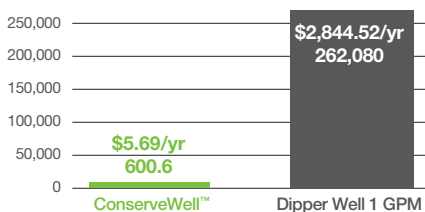

*52 weeks at 7 days per week at 12 hours per day.
Average water and sewer rate of \$9.48 per 1,000 gal.



CONSERVEWELL™
Model CW-DI

Application

- Replace a traditional dipper well perpetual-flow sink to save water, energy and money
- Drop into a serving station to keep utensils clean and handy

Fast Facts

Environmentally friendly method of rinsing and protecting utensils against bacteria growth versus traditional dipper wells; one unit can save over 250,000 gallons of water per year.

The ConserveWell™ keeps serving utensils above 140° F, keeping them safe while saving water, energy and money.

Unit drops into most existing counter cut-outs for perpetual flow dipper wells. Features a cool touch material for easy handling.

CONSERVEWELL™ UTENSIL HOLDER Model CW-DI



1.800.558.8722
ConserveWell-NotDipperWell.com

CLEAN HAS NEVER BEEN MORE GREEN.

CONSERVEWELL™ Model CW-DI

Specifier Statement

Unit will be a Server Products Model CW-DI ConserveWell™ designed to hold utensils above 140° F as an alternative to a perpetual-flow dipper well. Thermal composite housing is cool-to-touch, includes (1) stainless steel inset and is sold with or without a countdown timer. When changing out water, be sure to fill the pan with 28 oz of warm tap water, or up to the fill line. For use with plastic handled utensils and non-gel-filled dishers. NSF listed. C-UL-US listed. Two-year warranty. Made in the USA. Ships FOB Richfield, WI 53076.

Specifications

Part Number	Dimensions (height x width x depth)	Dim A	Cut Out Dimensions	Weight	Electrical
87770	3 3/8" x 6 25/32" x 10 13/32"	6"	Fits 5 1/2" to 6 1/2" openings	6 lbs	120V
87760	8.57 x 17.22 x 26.44 cm	15.24 cm		2.7 kg	100W 1A



Plug is NEMA 5-15P with 108" (274.3 cm) cord




ConserveWell™ Product Codes

- ☐ ConserveWell™ with Timer CW-DI 87770
- ☐ ConserveWell™ without Timer CW-DI 87760

Related Item

Another option to replace a traditional dipper well perpetual-flow sink is the ConserveWell™ that mounts on almost any wall or vertical surface. Unit comes standard with (2) 1/8-size pans 150 mm deep. This unit is also available with or without a timer.

- ☐ ConserveWell™ Wall Mount with Timer CW 87750
- ☐ ConserveWell™ Wall Mount without Timer CW 87740

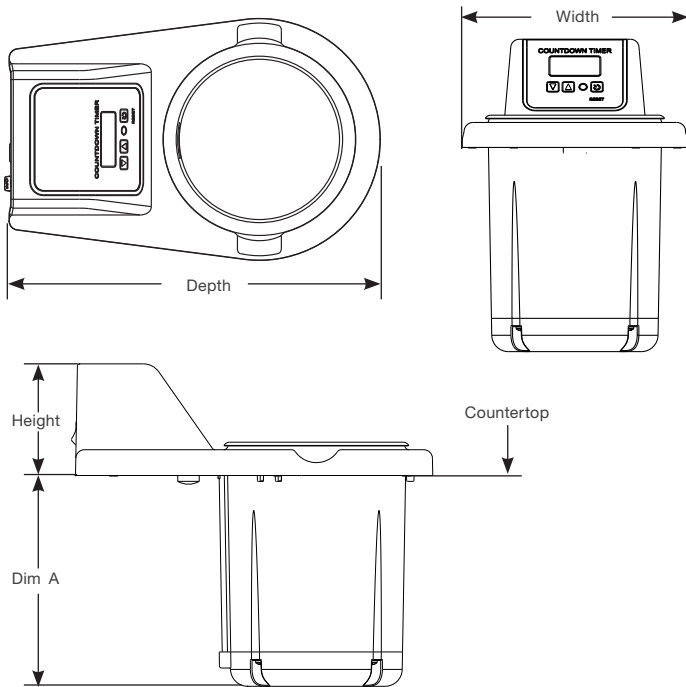

CW 87750



CW 87740



Server Products, Inc. 800.558.8722 | Intl: 262.628.5600
3601 Pleasant Hill Road | Richfield WI 53076
spsales@server-products.com | server-products.com

Server Products, Inc. reserves the right to modify specifications without obligation.
Printed in USA | © Server Products, Inc 05.2019 | S 02128