

HORIZONTAL BOTTLE COOLERS

EBC – Series • EBC37 • EBC50 • EBC65 • EBC80 • EBC95



▲ EBC37



▲ EBC50



▲ EBC65



▲ EBC80



▲ EBC95

Cabinet Construction

Heavy duty stainless steel countertop, rail and lids, with textured and laminated black vinyl exterior. Galvanized steel interior. 1 3/4" thick high density foamed-in-place polyurethane insulation. Built-in caster thread receptacles for all units.

Refrigeration System

- Side mounted condensing unit
- Oversized condenser and evaporator coils quickly achieve and maintain desired temperature
- Forced-air cooling with multiple evaporator fan motors provide balanced airflow throughout cabinet to ensure faster temperature drop
- Removable side panel and slide-out condensing unit for convenient repair and maintenance
- Environmentally friendly CFC free R-134A refrigerant
- Air defrost controlled by electrical timer
- Copper tube and aluminum fin evaporator with anti-corrosive coating
- Energy efficient condensate drain pan assembly heated by high side copper tube
- Pre-wired and ready to plug, 115V/60Hz/1Ph, NEMA 5-15P

Lighting

- Shielded vertical LED interior lighting with on/off switch for energy efficiency, minimal heat generation and enhanced illumination (*available from 2017 models*)

Lids & Locks, Openers

- Heavy duty stainless steel, easy glide and removable lids
- 3/4" thick lids, foamed-in-place polyurethane insulation
- Ratchet lock to secure lids (standard)
- Removable bottle cap opener and cap catcher

Shelving

- Epoxy coated floor wire shelves for cold air circulation
- Adjustable epoxy coated wire bin dividers

Temperature Control

- Factory preset temperature, 35°F
- Temperature setting range from 32°F to 42°F
- Easy to set analog thermostat


Option

- 2 1/2" and 4" diameter casters (3 1/2" and 5" overall height)




Dimensions

Side View

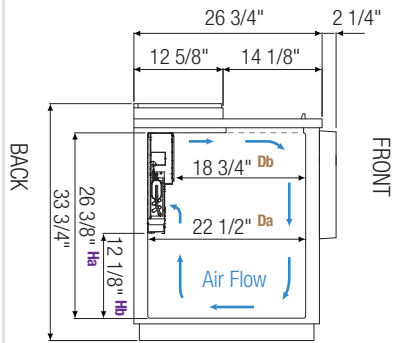

√ : Drain



T-Shaped PVC
Drain Fittings w/
Movable Plug.


It is required to
use a hose
attachment w/
3/4" inner diameter.




Lids come standard with ratchet locks.






Equipped with 9 ft long NEMA 5-15P plug.




▲ EBC37




▲ EBC50

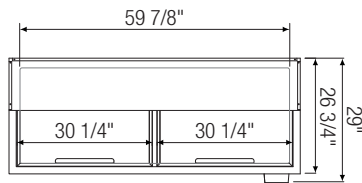




▲ EBC65

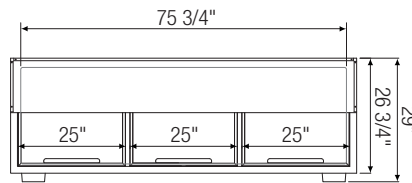

▲ EBC80

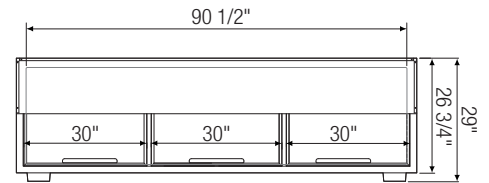

▲ EBC95

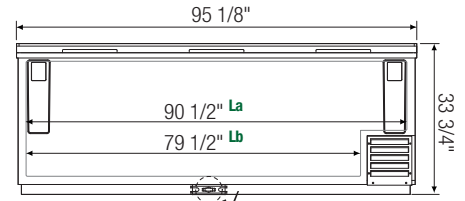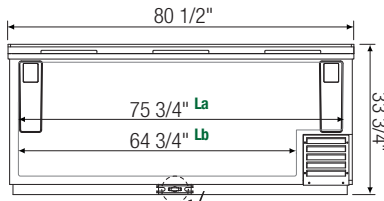

Model	Ref/ Frz/ Dual	Capacity (Cu.Ft.)	# of Lids	HP	Refrigerant	# of Bin Dividers	Capacity		# of Shelves	Power (V-Hz-Ph)	Amps	Crated Weight (LBS)	Exterior Dimensions (Inches)		
							12 oz. Cans	12 oz. Bottles					L	D*	H
EBC37	Ref	11.03	1	1/4+	R-134A	2	348	264	1	115-60-1	4.20	204	36 3/4	26 3/4	33 3/4
EBC50	Ref	15.37	2	1/4+	R-134A	3	576	396	2	115-60-1	4.20	245	49 1/2	26 3/4	33 3/4
EBC65	Ref	20.56	2	1/4+	R-134A	4	780	528	2	115-60-1	4.20	286	64 5/8	26 3/4	33 3/4
EBC80	Ref	26.01	3	1/3	R-134A	5	1,008	720	3	115-60-1	5.30	348	80 1/2	26 3/4	33 3/4
EBC95	Ref	31.08	3	1/3	R-134A	6	1,320	900	3	115-60-1	5.30	428	95 1/8	26 3/4	33 3/4

* : Depth does not include bottle cap opener with integrated cap receptacle.

Ref = Refrigerator

La, Lb : Interior Length Da, Db : Interior Depth Ha, Hb : Interior Height

Specifications subject to change without notice.

Product dimensions are for general purposes and not absolute value. Product capacity(►) is calculated based on standard industry figures. Slight variations may exist. If dimensions and capacity are critical, please contact Everest Refrigeration.

ver .031518



Please visit our website for updated
Energy Efficiency information.