

HORIZONTAL BOTTLE COOLERS

EBC – Series • EBC37 • EBC50 • EBC65 • EBC80 • EBC95



▲ EBC37



▲ EBC50



▲ EBC65



▲ EBC80



▲ EBC95

Cabinet Construction

Heavy duty stainless steel countertop, rail and lids, with textured and laminated black vinyl exterior. Galvanized steel interior. 1 3/4" thick high density foamed-in-place polyurethane insulation. Built-in caster thread receptacles for all units.

Refrigeration System

- Side mounted condensing unit
- Oversized condenser and evaporator coils quickly achieve and maintain desired temperature
- Forced-air cooling with multiple evaporator fan motors provide balanced airflow throughout cabinet to ensure faster temperature drop
- Removable side panel and slide-out condensing unit for convenient repair and maintenance
- Environmentally friendly CFC free R-134A refrigerant
- Air defrost controlled by electrical timer
- Copper tube and aluminum fin evaporator with anti-corrosive coating
- Energy efficient condensate drain pan assembly heated by high side copper tube
- Pre-wired and ready to plug, 115V/60Hz/1Ph, NEMA 5-15P

Lighting

- Shielded vertical LED interior lighting with on/off switch for energy efficiency, minimal heat generation and enhanced illumination (*available from 2017 models*)

Lids & Locks, Openers

- Heavy duty stainless steel, easy glide and removable lids
- 3/4" thick lids, foamed-in-place polyurethane insulation
- Ratchet lock to secure lids (standard)
- Removable bottle cap opener and cap catcher

Shelving

- Epoxy coated floor wire shelves for cold air circulation
- Adjustable epoxy coated wire bin dividers

Temperature Control

- Factory preset temperature, 35°F
- Temperature setting range from 32°F to 42°F
- Easy to set analog thermostat


Option

- 2 1/2" and 4" diameter casters (3 1/2" and 5" overall height)




Dimensions

Side View

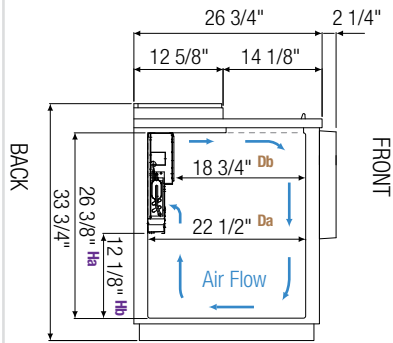

√ : Drain



T-Shaped PVC
Drain Fittings w/
Movable Plug.


It is required to
use a hose
attachment w/
3/4" inner diameter.




Lids come standard with ratchet locks.






Equipped with 9 ft long NEMA 5-15P plug.




▲ EBC37




▲ EBC50

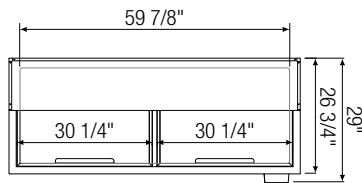




▲ EBC65

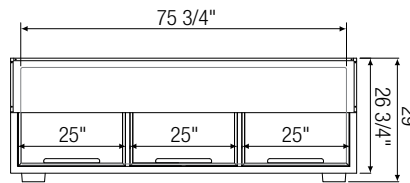

▲ EBC80

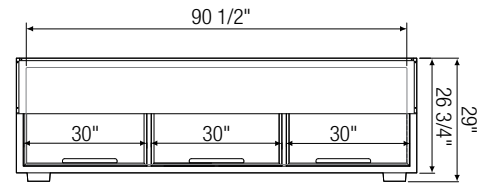

▲ EBC95

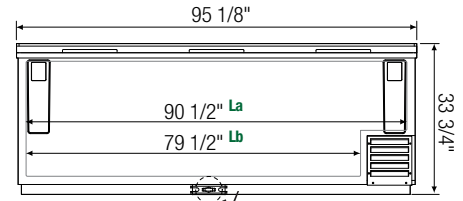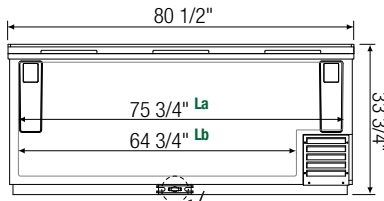

Model	Ref/ Frz/ Dual	Capacity (Cu.Ft.)	# of Lids	HP	Refrigerant	# of Bin Dividers	Capacity		# of Shelves	Power (V-Hz-Ph)	Amps	Crated Weight (LBS)	Exterior Dimensions (Inches)		
							12 oz. Cans	12 oz. Bottles					L	D*	H
EBC37	Ref	11.03	1	1/4+	R-134A	2	348	264	1	115-60-1	4.20	204	36 3/4	26 3/4	33 3/4
EBC50	Ref	15.37	2	1/4+	R-134A	3	576	396	2	115-60-1	4.20	245	49 1/2	26 3/4	33 3/4
EBC65	Ref	20.56	2	1/4+	R-134A	4	780	528	2	115-60-1	4.20	286	64 5/8	26 3/4	33 3/4
EBC80	Ref	26.01	3	1/3	R-134A	5	1,008	720	3	115-60-1	5.30	348	80 1/2	26 3/4	33 3/4
EBC95	Ref	31.08	3	1/3	R-134A	6	1,320	900	3	115-60-1	5.30	428	95 1/8	26 3/4	33 3/4

* : Depth does not include bottle cap opener with integrated cap receptacle.

Ref = Refrigerator

La, Lb : Interior Length Da, Db : Interior Depth Ha, Hb : Interior Height

Specifications subject to change without notice.

Product dimensions are for general purposes and not absolute value. Product capacity(►) is calculated based on standard industry figures. Slight variations may exist. If dimensions and capacity are critical, please contact Everest Refrigeration.



Please visit our website for updated
Energy Efficiency information.