



GLO-RITE® DISPLAY LIGHTS

Models HL-18, -24, -24-2, -30, -30-2, -36, -36-2, -42, -42-2, -48, -48-2, -54, -54-2, -60, -60-2, -66, -66-2, -72, -72-2

Durable and effective light strips made of extruded aluminum housings with bright annealed reflectors for maximum brightness, the Glo-Rite® Lights use shatter-resistant incandescent bulbs. These bulbs have a special protective coating that meets NSF standards for food holding and display areas.

FLEXIBILITY

Ideal for use in food preparation, holding and display areas.

Models available from 18" up to 6' (457-1829 mm). Available with additional lamp assemblies for greater illumination. An adjustable angle bracket is available for mounting.

QUALITY

The following features assure the finest performance for years to come:


- Durable and effective light strips for use in food preparation, holding and display areas.
- Bright annealed reflectors for maximum brightness.
- Shatter-resistant incandescent lights enhance product display while safeguarding food products from bulb breakage.
- Each unit has its own on-off switch for operator control.



Model HL-24-2 (including extra lamp assembly), lamps on 12" (305 mm) centers standard



Display Lights

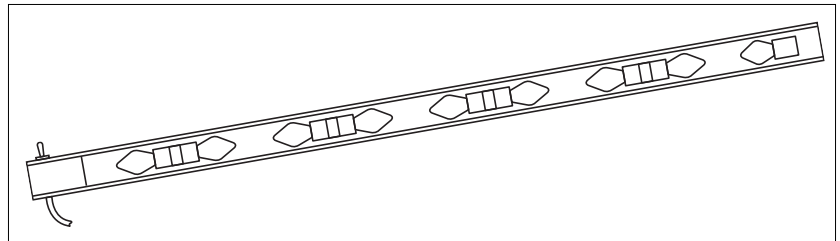

Model HL-60-2 Display Light with extra lamps



HATCO CORPORATION P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A.
 (800) 558-0607 • (414) 671-6350 • Fax (800) 543-7521 • Int'l. Fax (414) 671-3976
www.hatcocorp.com • E-mail: equipsales@hatcocorp.com


Form No. HL Spec Sheet

Printed in U.S.A.
 December 2011



GLO-RITE® DISPLAY LIGHTS

Models HL-18, -24, -24-2, -30, -30-2, -36, -36-2, -42, -42-2, -48, -48-2, -54, -54-2, -60, -60-2, -66, -66-2, -72, -72-2

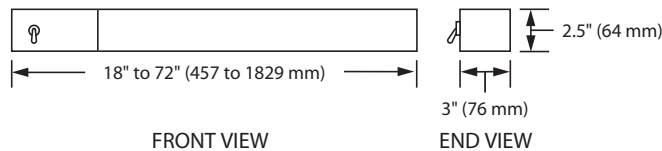

SPECIFICATIONS

Model	Watts*	Amps	Width	No. of Bulbs	Shipping Weight
HL-18	120	1.0	18" (457 mm)	2	6 lbs. (3 kg)
HL-24	120	1.0	24" (610 mm)	2	7 lbs. (3 kg)
HL-24-2†	180	1.5	24" (610 mm)	3	7 lbs. (3 kg)
HL-30	120	1.0	30" (762 mm)	2	7 lbs. (3 kg)
HL-30-2†	240	2.0	30" (762 mm)	4	7 lbs. (3 kg)
HL-36	180	1.5	36" (914 mm)	3	8 lbs. (4 kg)
HL-36-2†	300	2.5	36" (914 mm)	5	8 lbs. (4 kg)
HL-42	180	1.5	42" (1067 mm)	3	10 lbs. (5 kg)
HL-42-2†	360	3.0	42" (1067 mm)	6	10 lbs. (5 kg)
HL-48	240	2.0	48" (1219 mm)	4	11 lbs. (5 kg)
HL-48-2†	420	3.5	48" (1219 mm)	7	12 lbs. (5 kg)
HL-54	240	2.0	54" (1372 mm)	4	12 lbs. (5 kg)
HL-54-2†	480	4.0	54" (1372 mm)	8	13 lbs. (6 kg)
HL-60	300	2.5	60" (1524 mm)	5	13 lbs. (6 kg)
HL-60-2†	540	4.5	60" (1524 mm)	9	14 lbs. (6 kg)
HL-66	300	2.5	66" (1676 mm)	5	14 lbs. (6 kg)
HL-66-2†	600	5.0	66" (1676 mm)	10	15 lbs. (7 kg)
HL-72	360	3.0	72" (1829 mm)	6	15 lbs. (7 kg)
HL-72-2†	600	5.0	72" (1829 mm)	10	16 lbs. (7 kg)

* With 60 Watt bulb.


† Includes extra lamp assembly.

DIMENSIONS

18"-72"W x 3"D x 2.5"H (457-1829 x 76 x 64 mm).

VOLTAGE

120 volts, single phase only.



Adjustable Angle Bracket

OPTIONS (NOT FOR RETROFIT)

- ☐ Designer Colors: Warm Red, Black, Gray Granite, White Granite, Navy Blue, Hunter Green, Antique Copper
- ☐ Halogen Bulbs in lieu of Standard Display Lights
- ☐ 40 Watt Bulbs in lieu of Standard Display Lights (Ideal for Salad Bars)
- ☐ Remote Toggle Switch Control
- ☐ Extended Electrical Leads

ACCESSORIES

- ☐ Adjustable Angle Bracket

PRODUCT SPECS

Display Light

The Display Light shall be a Glo-Rite® Model ... as manufactured by the Hatco Corporation, Milwaukee, WI 53234 U.S.A.

With 24/7 parts and service assistance (US and Canada only) the Display Light shall be rated at ... watts, ... volts and be ... inches (millimeters)

in overall width. It shall consist of an extruded aluminum housing with bright annealed reflectors and shatter-resistant incandescent display lights.

Accessories shall include adjustable angle bracket.