



FRYER THREE TUBE BURNER BLF3-LPG / BLF3-NG 4.7 gallon / 40lbs

PRODUCT DESCRIPTION

 Expanded "Hot Zone", due to 3 super efficient cast iron tube burners in each Fryer. Even heat distribution and quick recovery. Oil temperature fluctuations are regulated by a heavy-duty probe that activates a climate assist burner for reliable and even heat consistency.

 Millivolt safety control system regulates temperatures for BLF3-LPG/NG. Temp range of control is 200 - 400 degrees Fahrenheit.

 ALL areas of the internal frypot can be reached and cleaned by hand. No "out of reach" zones.

 Oversized cold zone and gently pitched frypot floor promote particle and sediment collection toward the front of the Fryer for easy removal and cleaning. Larger Cold zone and localized sediment collection allows for cleaner and longer lasting oil usage.

*Legs option is available



MODEL#	DIMENSIONS		
	Width	Depth	Height
BLF3-NG	15 1/2in	32 7/8in	45in
BLF3-LPG	15 1/2in	32 7/8in	45in

* All measures are presented in Inches




223 W. Rosecrans Ave. Gardena, CA 90248
T: 310.808.0102
F: 310.808.0242


9 W. Shelton Terrace #A Hillside, NJ 07025
T: 908.688.0970
F: 908.688.8143

DETAILS & SPECIFICATIONS


FRYER THREE TUBE BURNER BLF3-LPG / BLF3-NG

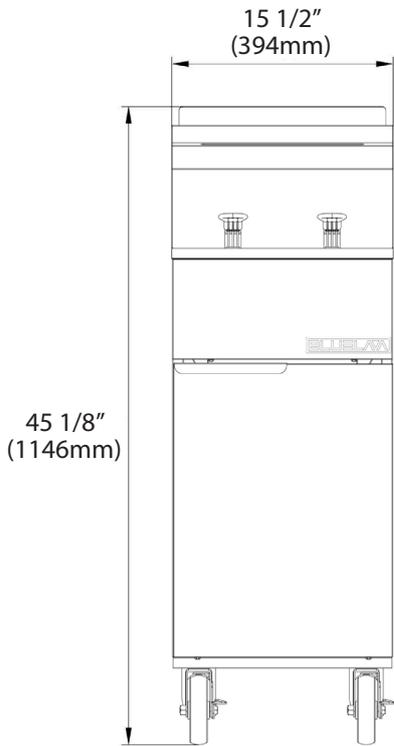

Front View

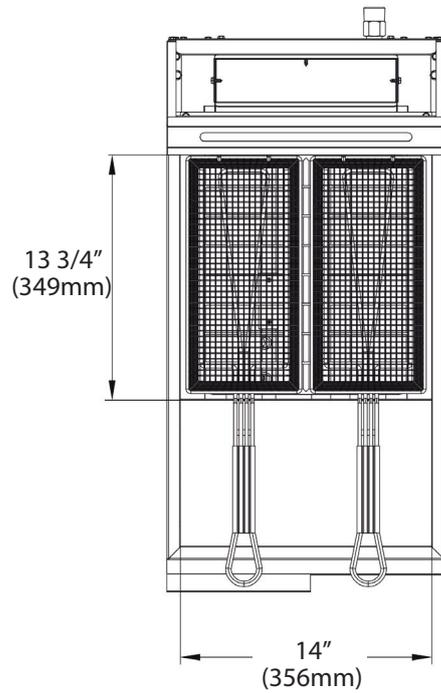

Top View

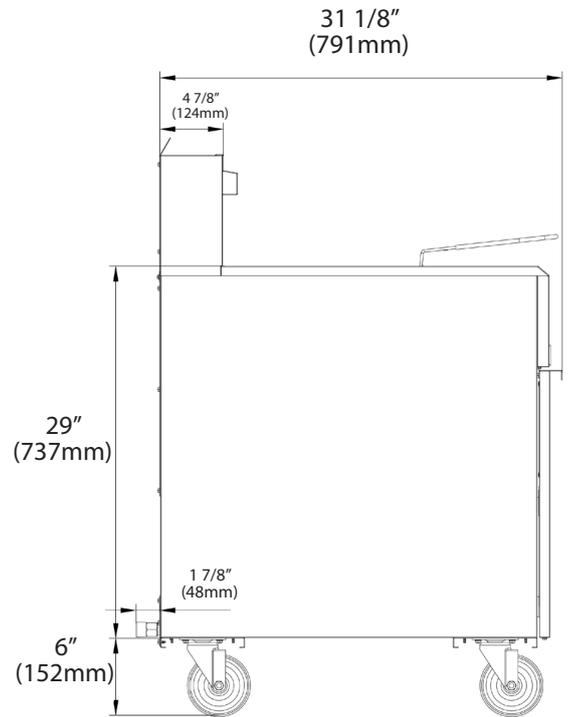

Side View

BLF3-LPG	
GAS	LPG
WORK AREA	14.01x13.98in
BURNERS	3
BTU/H PER BUNER	30,000
TOTAL BTU/H	90,000
OIL TANK CAPACITY	4,7gallon / 40lbs
GAS PRESSURE	10 "WC
NOZZEL	52#
CONTAINER FITMENT	130

BLF3-NG	
GAS	NG
WORK AREA	14.01x13.98in
BURNERS	3
BTU/H PER BUNER	30,000
TOTAL BTU/H	90,000
OIL TANK CAPACITY	4,7gallon / 40lbs
GAS PRESSURE	4 "WC
NOZZEL	39#
CONTAINER FITMENT	130

Model	Packaging Dimensions (inches)			Net Weight (lbs)	Ship Weight (lbs)
	W	D	H		
BLF3-LPG	17 7/8"	35 3/8"	37 5/8"	165.35	187.39
BLF3-NG	17 7/8"	35 3/8"	37 5/8"	165.35	187.39

